

SEA TEL 100 TV

3-Axis marine stabilized antenna system ready for worldwide Ku-Band reception

2014 Product Sheet

COBHAM

The most important thing we build is trust

The Sea Tel 100 TV antenna system features advanced technology that enables the user to receive Ku-Band High Definition satellite services worldwide without ever having to change the LNB. With our simple to use MMI, changing satellite services is as simple as a few button clicks away.

With advanced stabilization, the Sea Tel 100 TV is made for extreme conditions. Whether at dockside, anchor or rocking and rolling on the 7 Seas, the Sea Tel 100 TV is the right antenna for watching your favorite satellite TV programming.

Key Features & Benefits

- Programmable LNB that receives worldwide Ku-Band services. No more changing LNB's when travelling to different regions of the world.
- Advanced stabilization for viewing satellite TV even in rough sea conditions.
- Integrated DVB-S2 tuner for reception and identification of DVB-S2 and DVB-S satellite broadcasts.
- Frequency tuned radome minimizes signal loss.
- Easy installation and use. Uses same bolt pattern as the Sea Tel Series 04 systems.
- Extensive capabilities for online and offline troubleshooting.
- Intuitive and secured user interface with extensive data logging capabilities.
- Worldwide service along with 2 years parts and 2 years labor warranty (Flex warranties available).
- Built to last in extreme conditions
- Global satellite library.



Sea Tel 100 TV

3-Axis marine stabilized antenna system ready for worldwide Ku-Band HD reception




Typical Data for Sea Tel 100 TV

SPECIFICATIONS

| | |
|-----------------------------|---|
| Min. EIRP Ku-Band | 41.5 dBW |
| Dish Diameter | 101.6 cm (40 in) |
| Radome Diameter | 136.46 cm (53.72 in) |
| Radome Height | 152.2 cm (59.9 in) |
| ADE Weight | 99.79 kg (220 lbs.) |
| Operating Temperature Range | -20° C to 55° C |
| Storage Temperature Range | -40° C to 70° C |
| Pedestal Type | 3 Axis (Azimuth, Elevation, Cross Level) |
| Ships Motion | Roll +/- 25°; Pitch +/- 15° |
| Turning Rate | 15°/sec @ 5°/sec ² |
| Azimuth Range | 680° |
| Elevation Range | -15° to 115° |
| Polarization | Linear/Circular Selectable |
| Stabilization Accuracy | 0.2° Peak error under specified ship's motion |
| Skew Control | Automatic |
| LNB Type | Ku-Band Worldwide Programmable |
| Frequency Range | Ku-Band (10.7 - 12.75 GHz) |
| Warranty | 2 years parts / 2 years labor |

Typical Data for Lite Media Exchange Point (LMXP)

- Standard 19 inch 1U rack mount
- 43.18 cm x 25.4 cm x 4.44 cm (17" x 10" x 1.75")
- 110/220VAC, 47-63 Hz, Single Phase
- 2.45 kg (5.4 lbs)
- 2 Ethernet Ports
- 1 F-type connector
- 8 Tri-colored MXP status LED's
- USB Device (Mini B)
- 1 RS-232 pass through port
- 1 NMEA RS-232 serial port
- 1 RS-232 Console Port
- Aux IN1 & Aux IN2
- SW1, SW2 (I/O)
- 1 Gigabit SFP Ethernet

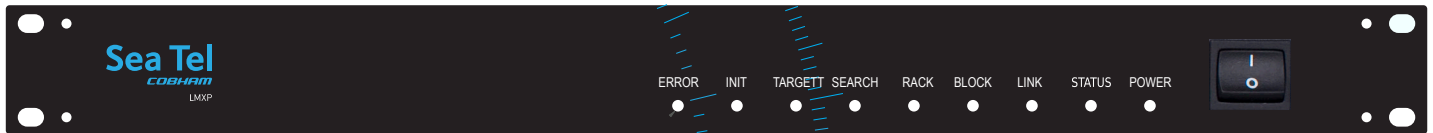

Subject to change without further notice.

For further information please contact:

satcom.ohc@cobham.com